

Monitor and control branch current, voltage, and power with highly reliable Metered Power Distribution Units from Lite-On Power System Solutions. Featuring tool-less mounting and available power configurations for any environment, these Power Distribution Units provide stable power to equipment.

Key Features

- Simple and reliable Power Distribution Units
- Metered for input and branch current, voltage, frequency, and power
- Overload protection
- Power cord retention feature
- Tool-less mounting design



Model Name	Region	Power	Phase	Pole	CB	C13	C19	Input Connection	Voltage
RU-2030-421N	N.America	6kW	Single Phase	2	2	36	6	NEMA L6-30P	200-240V
RU-7030-422N	N.America	10kW	Three Phase Delta	2	3	36	6	NEMA L15-30P	208V
RU-2030-211N	N.America	4kW	Single Phase	2	1	18	3	NEMA L6-30P	200-240V
RU-7030-212N	N.America	10kW	Three Phase Delta	2	3	18	3	NEMA L15-30P	208V
RU-3032-421M	International	7kW	Single Phase	1	2	36	6	IEC309-32 2P3W	240V
RU-B032-422M	International	20kW	Three Phase Wye	1	6	36	6	IEC309-32 4P5W	415V
RU-B032-423M	International	13kW	Three Phase Wye	1	3	36	6	IEC309-32 4P5W	415V
RU-3016-211M	International	4kW	Single Phase	1	1	18	3	IEC309-32 2P3W	240V
RU-B032-212M	International	13kW	Three Phase Wye	1	3	18	3	IEC309-32 4P5W	415V

Lite-On Power System Solutions USA
 3001 Summit Avenue, Suite 400, Plano, TX 75074
 +1 (469) 331-9838
www.liteon-pss.com
 email: pss.sales@liteon.com

Lite-On Power System Solutions Taiwan
 No. 90, Chien 1 Rd., Chung Ho Dist, New Taipei City 23585
 +886 -2-2226181 ext 5026
www.liteon-pss.com
 email: pss.sales@liteon.com

Specifications

Electrical	
Input Voltage	Options: 200-240V 1Phase, 200-240 Delta, 380-415V Wye
Input Rated Current	24-32A
Input Connection	Options: L6-30, L15-30, IEC309
Input Frequency	50Hz to 60Hz
Output Voltage	Based on input (3.8kVA ~ 18.6kVA)
Output Current (max)	IEC320-C13 13A(NA)10A(Intl), IEC320-C19 16A
Output Outlet	IEC320-C13 (18 or 36), IEC320-C19 (3 or 6) Output Current per Branch ≤ 16A
Output Protection	20A CB per Branch (NA), 16A CB per Branch (Intl)
Physical	
Dimensions (H x W x D)	54mm x 54mm x 1689mm (Full), 54mm x 54mm x 1109mm (Mid)
Weight	Varies per model
Cord Length	9.84' (3 m)
Chassis material	SGCC Steel
Mounting	Toolless Mounting for EIA racks
Outlet Retention	Retention Sleeve
Environment	
Temperature	Operating: 0°C to 50°C Storage: -25°C to 65°C
Humidity	0% to 95% relative (non-condensing)
Altitude	Operating: 0 m to 2000 m Storage: 0 m to 15000 m
General	
Safety	UL(CUL)-NA, CE and CB-Intl
FCC	Class A
Environmental	RoHS/WEEE
Warranty	2 years



Lite-On Power System Solutions USA
 3001 Summit Avenue, Suite 400, Plano, TX 75074
 +1 (469) 331-9838
www.liteon-pss.com
 email: pss.sales@liteon.com

Lite-On Power System Solutions Taiwan
 No. 90, Chien 1 Rd., Chung Ho Dist, New Taipei City 23585
 +886 -2-2226181 ext 5026
www.liteon-pss.com
 email: pss.sales@liteon.com

Monitoring Features



User Interface	
LCD	Graphical LCD
Navigation Buttons	4 buttons (up, down, enter, escape)
Ethernet port	100/1000Mb, full duplex
Daisy Chain ports	Canbus, up to 20
Environmental port	Through Canbus
Reset Button	Yes
Visual Alarms	Red and Green LED
Monitor	
Input	Voltage
Output	Voltage, Current, Power, Frequency
RMS	Voltage, Current
Power Factor	Yes
Apparent Power	Yes
Network Communication	
Ethernet	100/1000Mb Full Duplex
Protocols Supported	IPv4, HTTP, HTTPS(TLSv1.2), SMTP, SMTPS, DHCP, SNMP(v2c/v3), NTP, SSH, and Syslog
User interface	Liteon specific, SNMP, JSON-based Web GUI, Command-line interface using SSH
Monitor (Through network connection)	
Input	Voltage
Output	Voltage, Current, Power, Frequency
RMS	Current, Voltage
Power Factor	Yes
Thresholds	Current and Voltage (Minimum and Maximum)
Apparent Power	Yes
Security	RADIUS and HTTPS





Lite-On Power System Solutions USA
 3001 Summit Avenue, Suite 400, Plano, TX 75074
 +1 (469) 331-9838
www.liteon-pss.com
 email: pss.sales@liteon.com

Lite-On Power System Solutions Taiwan
 No. 90, Chien 1 Rd., Chung Ho Dist, New Taipei City 23585
 +886 -2-2226181 ext 5026
www.liteon-pss.com
 email: pss.sales@liteon.com

North America Models



International Models

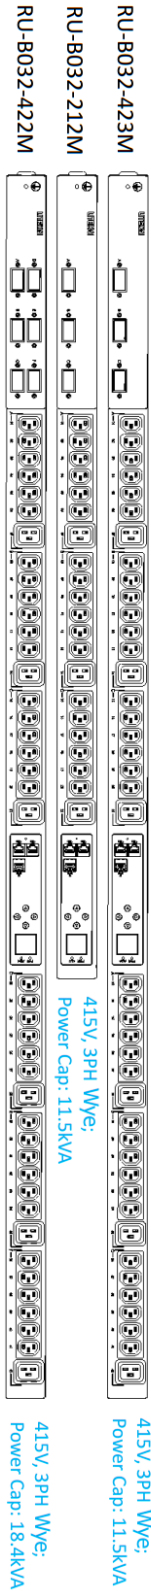

Long Version: 1689mm(L)x54mm(W)x54mm(D) Short Version: 1109mm(L)x54mm(W)x54mm(D)

Lite-On Power System Solutions USA
3001 Summit Avenue, Suite 400, Plano, TX 75074
+1 (469) 331-9838
www.liteon-pss.com
email: pss.sales@liteon.com

Lite-On Power System Solutions Taiwan
No. 90, Chien 1 Rd., Chung Ho Dist, New Taipei City 23585
+886 -2-2226181 ext 5026
www.liteon-pss.com
email: pss.sales@liteon.com